

LDL Enhanced Littrow External Cavity Diode Laser



The MOGLabs LDL Enhanced Littrow External Cavity Diode Laser is our fourth-generation Littrow laser for advanced applications in atomic and quantum physics.

The LDL Enhanced offers a number of advantages relative to earlier designs and competing products in the market, providing a robust, stable, and vibrationally inert device. Grating rotation and vertical alignment are uncoupled, allowing simple tuning over the full diode wavelength range without realignment. Mode-hop-free scanning range of 60GHz. Durable design with long-life piezos, sapphire wear pads, ball-bearing pivot. Improved suppression of adjacent cavity modes to ensure single-mode operation. Hermetic seal to reduce sensitivity to air pressure changes. Beam alignment with laser centre regardless of wavelength. Dramatic improvements to ease of alignment and focus without opening the cavity allow inexperienced users to quickly change laser diode. Wavelength options extend from 368nm to 1620nm, and powers up to 250mW extra-cavity.

Features

- Wavelengths from 368 to 1620nm
- Vibrationally inert
- Wide tuning range
- Decoupled grating rotation and tilt
- Wide mode-hop free scan range
- Narrow linewidth
- Fastest piezo feedback on the market
- Precision alignment controls, including focus
- High bandwidth low latency current modulation
- Simple and fast diode replacement

Applications

- Laser cooling and trapping
- Bose-Einstein condensation
- Quantum optics: squeezed light
- Electromagnetic transparency and slow light
- Time and frequency standards
- Laser spectroscopy

Littrow External Cavity Diode Laser

Specifications LDL Enhanced

Wavelength/frequency

368nm to 1612nm	Up to 250mW output power, diode dependent
Linewidth	Typically <200kHz, diode dependent
Modulation	20MHz bandwidth, AC or DC coupled, 20ns latency RF bias tee option: >2.5GHz bandwidth
Coarse tuning range	Up to 50nm for single diode

Optical

Beam diameter (1/e ²)	Typically 1mm x 2mm to 1.5mm x 4mm; diode-dependent
Polarisation	Linear 100:1 typical

Thermal

TEC	±14.5V 3.3A Q = 23W standard
Sensor	NTC 10kΩ standard; AD590, 592 optional
Stability at base	±1mK (controller dependent)
Cooling	Water cooling connections optional (usually not required)

Sweep/scan

Scan range	> 60 GHz; with MOGLabs controller, rate 4Hz to 70Hz
Mode-hop free scan	10 GHz to 60GHz, diode dependent, with current feed-forward
Piezo	0 – 120V or 0 – 150V, 2 to 5μm
Cavity length	15mm (10GHz FSR) approx.

Electronics


Protection	Relay, cover interlock connection, reverse diode
Indicator	Laser ON/OFF (LED)
Modulation input	20MHz bandwidth, AC or DC coupled, 20ns latency RF bias tee option: >2.5GHz bandwidth,
Connector	MOGLabs DLC Diode Laser Controller (single cable connect)

Dimensions

Dimensions	Laser: 58x55 x 31mm (LxWxH) Compact chassis: 108 x 70 x 87mm, 0.5kg Extended chassis: 240 x 95 x 93mm, 1.3kg
------------	--

Options

AR and non-AR diodes, Faraday isolators, compact and extended chassis, fibre coupling. Please contact MOGLabs for further details.

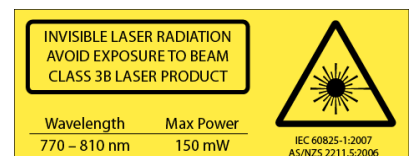

MOG Laboratories Pty Ltd
49 University St
Carlton VIC 3053
Australia
Tel: +61 3 9939 0677
info@moglabs.com

MOGLabs USA
419 14th St
Huntingdon, PA 16652
USA
Tel: (814) 251-4363
info@moglabsusa.com

© 2022 MOG Laboratories Pty Ltd

Product specifications and descriptions in this document are subject to change without notice