

# ARB RIDER

Time to **Reinvent** advanced signal generation

# AWG-4010 Rev.B SERIES Technical Datasheet



## 2 / 4 / 8 CHANNELS – ALL IN ONE: Function Generator, Arb Generator, Serial Pattern Generator and Digital Pattern Generator

- 2, 4 or 8 Analog Channels
- **1.2 GS/s 16 Bit** Vertical Resolution
- 400 MHz Bandwidth (300 Mbaud for Data Pattern Generator)
- Up to **24 V<sub>p-p</sub>** Output Voltage and  $\pm 12V$  HW Baseline Offset  
Total Output Voltage Window  $\pm 24V$  (48 V<sub>p-p</sub>) into High Impedance
- Up to **1Gpts** Waveform Memory per Channel
- Up to 32 Digital Channels in synchronous with analog Generation
- Simple Rider™ UI: designed for touch AWG/AFG/SPG user interfaces

### Key performance specifications

- **AFG Mode**
  - 400 MHz Sine Waveforms
  - 1.2 GS/s fixed, 16-bit vertical resolution
  - Amplitude up to 12 V<sub>p-p</sub> into 50  $\Omega$  load
  - Programmable hardware offset:  $\pm 6V$  into 50  $\Omega$
  - Improved DDS based technology
- **AWG Mode**
  - 1.2 GS/s Variable Clock, 16-bit vertical resolution
  - 8 bit, 16 bit or 32 bit digital channels
  - Up to 1 Gpts Waveform Memory per Channel
  - 318 MHz Calculated Bandwidth
  - Amplitude up to 12 V<sub>p-p</sub> into 50  $\Omega$  load
  - Programmable hardware offset:  $\pm 6V$  into 50  $\Omega$
- **Serial Pattern Generator (SPG) Mode - *Optional***
  - Up to 300Mbit/s NRZ bit stream generation
  - 2, 3 or 4 levels
  - 64 points arbitrary shape per transition
  - Programmable duration for any transition
  - Up to 2Mbit (2 levels) or up to 1MSymbols (3 or 4 levels) pattern memory for channel
  - Amplitude up to 12 V<sub>p-p</sub> into 50  $\Omega$  load
  - Programmable hardware offset:  $\pm 6V$  into 50  $\Omega$

## Features & Benefits

- Sample rate can be programmed in from 1 S/s to 1.2 GS/s, with 16-bit vertical resolution, ensures exceptional signal integrity
- Arbitrary waveform memory up to 1Gpts for each analog channel
- Mixed Signal Generation – 2, 4 or 8 Analog channels with 8, 16 or 32 synchronized Digital Channels for debugging and validating digital design
- Three operation modes – Simple Rider AFG (DDS AFG mode), True Arb (variable clock Arbitrary AWG mode) and SPG (Serial Pattern Generator - *Optional*)
- Digital outputs provide up to 1.2 Gb/s data rate in LVDS format. LVDS to LVTTTL adapter is available
- Advance sequencer with up to 16384 user defined waveforms provides the possibility of generating complex signal scenarios with the most efficient memory usage
- Windows based platform with 7in touch screen, front panel buttons and knob
- Compact form factor, convenient for bench top and fully fit with 3U – 19" rackmount standard
- LAN, USB-TMC and GPIB interfaces for remote control

## Applications areas

### Automotive



Today's cars are including a lot of highly sophisticated electronic control unit with very sensitive high technology electronic components.

The Arb Rider 4012/4014/4018 combining 1.2 GS/s with 16 bit vertical resolution, represents an ideal tool for successfully addressing the new testing challenges in automotive.

- CAN, CAN-FD, LIN, Flexray, SENT emulation
- EMI debugging, troubleshooting and testing
- Electrical standards emulation up to 24V
- Power MOSFET circuitry in automotive electronics optimization

### IoT and Ind 4.0 perfect RF Modulator



Arb and Function Riders will be the iconic instrument for these applications. The possibility to emulate complex RF I/Q modulation for simulation and Test vs wireless devices or working on Internet of things of industry 4.0 applications. Each engineer may use the possibility to import waveform to emulate devices under test, impose distortion on waveform (such noise) to test the ability of devices to be compliant to the standards.

### Research Applications

Research centers and Universities, are key users of Arb Rider generators's series.

Complex waveform and/or sophisticated Pulses emulation based on variable edges or multilevel could be perfectly created. The combination of fast edge generation, excellent dynamic range and easy to use user interface meet perfectly scientists and engineers working on large experiments such Accelerators, Tokamak or synchrotrons to emulate signals without creating specifics test boards.

- Emulation of detectors
- Emulation of signal sources adding noise
- Generation/playback of real-world signals
- Emulation of long PRBS sequences
- Modulating and driving laser diode

### Aerospace and Defense applications

Electronic warfare signals driven by Radar or Sonar systems perfectly match with these generators. Large BW Riders can be used on digital modulation systems for Radio Applications or others I/Q signal modulation.

Pulses may be easily generated for applications such Pulse Electron Beam or X Ray Sources, Flash X-ray Radiography, Lighting pulse simulators, high Power Microwave modulators.

- Frequency response, intermodulation distortion and noise-figure measurements
- Phase Locked Loop (PLL) pull-in and hold range characterization
- Radar base-band signals emulation

### Semiconductors Test


Emulation of complex signals generated with inclusion of noise or distortions may become an excellent way to provide Compliance Components Test to help semiconductors engineers. The fast edges and pulse generation can be used to provide characterization in fast power devices.

- Clock and Sensor signals generation
- MOSFET gate drive amplitude signal emulation
- Power up sequences of IC using the low impedance feature (5  $\Omega$  output impedance)

## Simple Rider AFG: Function Generator Mode Interface

**Simple Rider AFG** UI is designed for touch and it has been developed to put all the capabilities of modern Waveform Generators right at your fingertips. All instrument controls and parameters are accessed through an intuitive UI that recalls the simplicity of Tablets and modern smart phones: touch features and gestures are available to engineers and scientists to create advanced waveforms or digital patterns in few touches.

- The swipe gesture gives easy access to the output waveform parameters
- A touch-friendly virtual numeric keypad has been designed to improve the user experience on entering

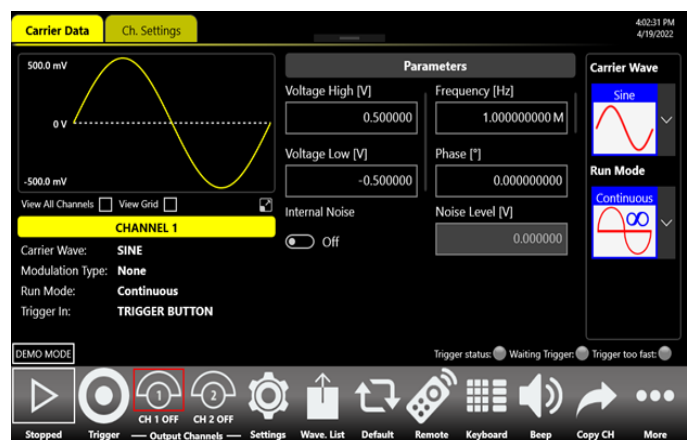

the data.

- Time saving shortcuts and intuitive icons simplify the instrument setup



## Simple Rider TrueArb: AWG Mode Interface

In **Simple Rider True-Arb** interface, the users can define complex waveforms with up to 16,384 sequence entries of analog waveforms and digital patterns, define their execution flow by means of loops, jumps and conditional branches.

Digital output combined and synchronized with analog output signals represent an ideal tool to troubleshoot and validate digital design. The waveform memory length of up to 1 GSamples on each channel combined with up to 16,384 and up to 4,294,967,294 repetitions, make the Arb-Rider 4012/4014/4018 the ideal generator for the most demanding technical applications.

Thanks to the intuitive and easy waveform sequencer user interface, the most complex waveform scenarios can be created with just few screen touches.

Up to 4 instruments can be synchronized together in order to obtain a 32 analog – 128 digital channel generator. A dedicated synchronization bus guarantees the intra-chassis synchronization. This feature is available on AWG4018 model only Arb Rider supports the standard Ethernet interface for remote control and easy customized instrument programming.

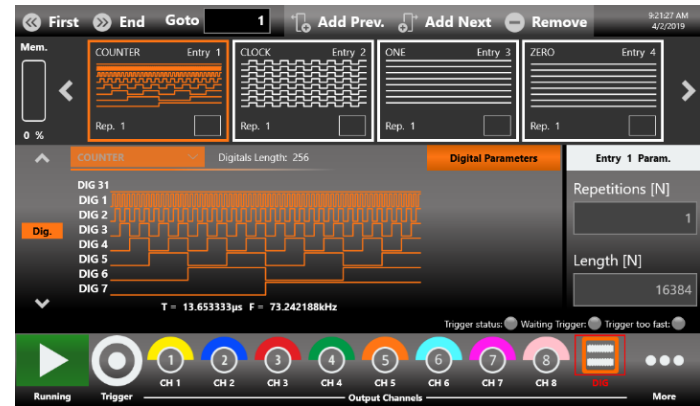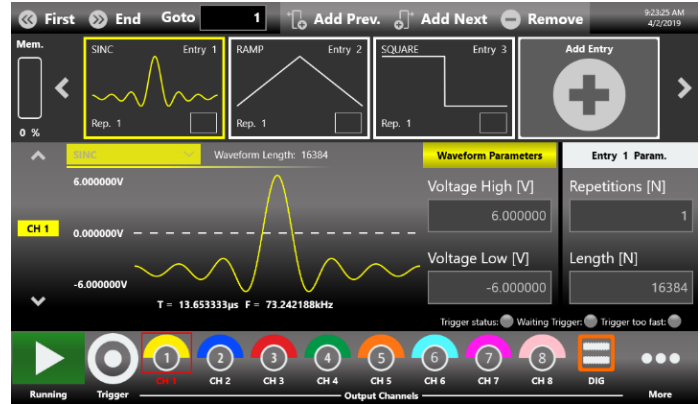

## Simple Rider SPG: Serial Pattern Generator (SPG) Mode Interface – *Optional*

The easiest touch screen display interface allows to create patterns scenarios, only in a few screen touches.


In summary the Data Pattern Generator provides the capability to generate PRBS patterns and up to 2MSymbols custom patterns where bit transitions can have arbitrarily user defined shapes. The ARB-RIDER-AWG4010 Serial Pattern Generator can generate patterns up to 300Mbaud.



The software architecture provides the possibility to easily generate the patterns in different generation modality and also gives the opportunity to modulate the patterns with internal or external signals with the purpose to generate also different effects of noise (jitter, ripple, ...).

All specifications are typical unless noted otherwise. The guaranteed performances are referred to a calibrated instrument that has been stored for a minimum of 2 hours within the operating temperature range of 5°C to 40°C and after a 45-minute warm up period. Within  $\pm 10^\circ\text{C}$  after auto-calibration.

Some specifications on this document refer to the available options and accessories that can be found in the table at the end of this document.

<b>General Specifications</b>			
<b>Number of Channels</b>	<b>AWG - 4012</b>	<b>AWG - 4014</b>	<b>AWG - 4018</b>
			
Analog out / DPG out	2	4	8
Digital out	0/8 optional	0/8/16 optional	0/8/16/32 optional
Marker out	1	2	4
<b>Operating Mode</b>	AFG Mode True Arb Mode Serial Pattern Generator ( <b>Optional</b> )		
<b>Amplitude</b>			
Range (50 $\Omega$ into 50 $\Omega$ ) <sup>1</sup>	0 to 6Vpp (12 V <sub>p-p</sub> optional)		
Accuracy (1kHz sine wave, 0V offset, > 5mV <sub>p-p</sub> amplitude, 50 $\Omega$ load) (guaranteed)	$\pm(1\% \text{ of setting } [V_{p-p}] + 5 \text{ mV})$		
Resolution	<0.5 mV <sub>p-p</sub> or 5 digits		
Output impedance	Single-ended: 50 $\Omega$ , Low Impedance: 5 $\Omega$		
<b>Baseline Offset</b>			
Range (50 $\Omega$ into 50 $\Omega$ )	-3 V to +3 V (-6V to +6V opt.)		
Range (50 $\Omega$ into High Z load)	-6 V to +6 V (-12V to +12V opt.)		
Accuracy (50 $\Omega$ into 50 $\Omega$ ) (guaranteed)	$\pm(1\% \text{ of }  \text{setting}  \pm 5 \text{ mV})$		
Resolution	<4 mV or 4 digits		

<sup>1</sup> Amplitude doubles on HiZ load

<b>DC</b>	
Amplitude range (50 $\Omega$ , single-ended)	-3V to 3V (-6V to 6V opt.)
Amplitude accuracy (guaranteed)	$\pm(1\% \text{ of }  \text{setting}  + 10 \text{ mV})$
<b>AFG Mode Specifications</b>	
<b>Output Channels</b>	
Connectors	BNC on front panel
Output type	Single-ended
Output Impedance	50 $\Omega$ or 5 $\Omega$ (low impedance)
<b>General Specifications</b>	
Operating mode	DDS mode
Standard Waveforms	Sine, Square, Pulse, Ramp, more (Noise, DC, Sin(x)/x, Gaussian, Lorentz, Exponential Rise, Exponential Decay, Haversine)
Run Modes	Continuous, modulation, sweep, burst
Arbitrary Waveforms	Vertical resolution: 16-bit Waveform length: 16,384 points
Internal Trigger Timer	
Range	
Resolution	13.3 ns to 100 s
Accuracy	104 ps $\pm(0.1\% \text{ setting} + 5 \text{ ps})$
<b>Sine Waves</b>	
Frequency Range Sine (50 $\Omega$ into 50 $\Omega$ ) <sup>2</sup>	1 $\mu\text{Hz}$ to $\leq 70 \text{ MHz}$ : 12V >70 MHz to $\leq 120 \text{ MHz}$ : 9V >120 MHz to $\leq 180 \text{ MHz}$ : 6V

<sup>2</sup> Amplitude doubles on HiZ load

<p>Flatness (1 V<sub>p-p</sub>, relative to 1 kHz)</p> <p>Harmonic Distortion (1 V<sub>p-p</sub>)</p> <p>Total Harmonic Distortion (1 V<sub>p-p</sub>)</p> <p>Spurious (1 V<sub>p-p</sub>) (excluding f<sub>Sa</sub> - f<sub>out</sub>, f<sub>Sa</sub> - 2*f<sub>out</sub>)</p> <p>Phase Noise (1 V<sub>p-p</sub>, 10 kHz offset)</p>	<p>&gt; 180 MHz to ≤ 400 MHz: 3V (without <b>HV opt.</b> the maximum amplitude is limited to 6 V)</p> <p>DC to 400 MHz: ±0.5 dB</p> <p>1 μHz to ≤ 10 MHz: &lt; -65 dBc &gt; 10 MHz to ≤ 50 MHz: &lt; -55 dBc &gt; 50 MHz to ≤ 100 MHz: &lt; -45 dBc &gt; 100 MHz to ≤ 400 MHz: &lt; -30 dBc</p> <p>10 Hz to 20 kHz: &lt; 0.1%</p> <p>1 μHz to ≤ 10 MHz: &lt; -60 dBc &gt; 10 MHz to ≤ 400 MHz: &lt; -55 dBc</p> <p>10 MHz: &lt; -120 dBc/Hz typ. 100 MHz: &lt; -115 dBc/Hz typ.</p>
<p><b>Square Waves</b></p> <p>Frequency Range</p> <p>Rise/fall time</p> <p>Overshoot (1 V<sub>p-p</sub>)</p> <p>Jitter (rms)</p>	<p>1 μHz to ≤ 40 MHz: 12V &gt; 40 MHz to ≤ 80 MHz: 10V &gt; 80 MHz to ≤ 150 MHz: 7V (without <b>HV opt.</b> the maximum amplitude is limited to 6 V)</p> <p>2 ns &lt; 2% &lt; 20 ps</p>

<p><b>Pulse Waves</b></p> <p>Frequency Range</p> <p>Pulse width</p> <p>Pulse width Resolution</p> <p>Pulse Duty Cycle</p> <p>Leading/trailing edge transition time</p> <p>Transition time Resolution</p> <p>Overshoot (1 <math>V_{p-p}</math>)</p> <p>Jitter (rms, with rise and fall time <math>\geq 2</math>ns)</p>	<p>1<math>\mu</math>Hz to <math>\leq 5</math> MHz: 12V</p> <p>&gt;5 MHz to <math>\leq 60</math> MHz: 10V</p> <p>&gt;60 MHz to <math>\leq 150</math> MHz: 7V</p> <p>(without <b>HV opt.</b> the maximum amplitude is limited to 6 V)</p> <p>2.5 ns to (Period – 2.5 ns)</p> <p>20 ps or 15 digits</p> <p>0% to 100%, 14 digits</p> <p>(limitations of pulse width apply)</p> <p>2 ns to 1000 s</p> <p>2 ps or 15 digits</p> <p>&lt; 2%</p> <p>&lt;20 ps</p>
<p><b>Double Pulse Waves</b></p> <p>Frequency Range</p> <p>Other Pulse Parameters</p>	<p><b>Without HV option :</b></p> <p>1<math>\mu</math>Hz to <math>\leq 5</math> MHz: 12 <math>V_{p-p}</math></p> <p>&gt;5 MHz to <math>\leq 100</math> MHz: 6 <math>V_{p-p}</math></p> <p>where <math>V_{p-p} =  V_{p-p 1}  +  V_{p-p 2} </math></p> <p><b>With HV option :</b></p> <p>1<math>\mu</math>Hz to <math>\leq 5</math> MHz: 24 <math>V_{p-p}</math></p> <p>&gt;5 MHz to <math>\leq 60</math> MHz: 10 <math>V_{p-p}</math></p> <p>&gt;60 MHz to <math>\leq 100</math> MHz: 7 <math>V_{p-p}</math></p> <p>where <math>V_{p-p} =  V_{p-p 1}  +  V_{p-p 2} </math></p> <p>Same as Pulse Waves</p>
<p><b>Ramp Waves</b></p> <p>Frequency Range</p>	<p>1 <math>\mu</math>Hz to 15 MHz</p>

Linearity (< 10 kHz, 1 V <sub>p-p</sub> , 100%)	≤ 0.1%
Symmetry	0% to 100%
<b>Other Waves</b>	
Frequency Range	
Exponential Rise, Exponential Decay	1 μHz to 15 MHz
Sin(x)/x, Gaussian, Lorentz, Haversine	1 μHz to 30 MHz
Additive Noise	
Bandwidth (-3 dB)	> 200 MHz
Level	0 V to 6 V –   carrier max value [V <sub>pk</sub> ]
Resolution	1 mV
<b>Arbitrary</b>	
Number of Samples	2 to 16,384
Frequency range	1 μHz to ≤ 150 MHz
Analog Bandwidth (-3 dB)	175 MHz
Rise/fall time	2 ns
Jitter (rms)	< 20 ps
<b>Frequency Resolution</b>	
Sine, square, pulse, arbitrary, Sin(x)/x	1 μHz or 15 digits
Gaussian, Lorentz, Exponential Rise, Exponential Decay, Haversine	1 μHz or 14 digits
<b>Frequency Accuracy</b>	
Non-ARB	±2.0 x 10 <sup>-6</sup> of setting
ARB	± 2.0 x 10 <sup>-6</sup> of setting ±1 μHz

<b>Modulations</b>	
<b>Amplitude Modulation (AM)</b>	
Carrier waveforms	Standard waveforms (except Pulse, DC and Noise), ARB
Modulation source	Internal or external
Internal modulating waveforms	Sine, Square, Ramp, Noise, ARB
Modulating frequency	Internal: 500 $\mu$ Hz to 48 MHz External: 8 MHz maximum
Depth	0.00% to 120.00%
<b>Frequency Modulation (FM)</b>	
Carrier waveforms	Standard waveforms (except Pulse, DC and Noise), ARB
Modulation source	Internal or external
Internal modulating waveforms	Sine, Square, Ramp, Noise, ARB
Modulating frequency	Internal: 500 $\mu$ Hz to 48 MHz External: 8 MHz maximum
Peak deviation	DC to 400 MHz
<b>Phase Modulation (PM)</b>	
Carrier waveforms	Standard waveforms (except Pulse, DC and Noise), ARB
Modulation source	Internal or external
Internal modulating waveforms	Sine, Square, Ramp, Noise, ARB
Modulating frequency	Internal: 500 $\mu$ Hz to 48 MHz

Phase deviation range	External: 8 MHz maximum  0° to 360°
<b>Frequency Shift Keying (FSK)</b>	
Carrier waveforms	Standard waveforms (except Pulse, DC and Noise), ARB
Modulation source Internal modulating waveforms	Internal or external  Square
Key rate	Internal: 500 µHz to 48 MHz, External: 8 MHz maximum
Hop frequency	1 µHz to 400 MHz
Number of keys	2
<b>Phase Shift Keying (PSK)</b>	
Carrier waveforms	Standard waveforms (except Pulse, DC and Noise), ARB
Modulation source Internal modulating waveforms	Internal or external  Square
Key rate	Internal: 500 µHz to 48 MHz, External: 8 MHz maximum
Hop phase	0° to +360°
Number of keys	2
<b>Pulse Width Modulation (PWM)</b>	
Carrier waveforms	Pulse
Modulation source Internal modulating waveforms	Internal or external  Sine, Square, Ramp, Noise, ARB

Modulating frequency	Internal: 500 $\mu$ Hz to 48 MHz External: 8 MHz maximum
Deviation range	0% to 50% of pulse period
<b>Sweep</b>	
Type	Linear, Logarithmic, staircase, and user defined
Waveforms	Standard waveforms (except Pulse, DC and Noise), ARB
Sweep time	40 ns to 2000 s
Hold/return times	0 to (2000 s – 40 ns)
Sweep/hold/return time resolution	20 ns or 12 digits
Total sweep time accuracy	$\leq 0.4\%$
Start/stop frequency range	Sine: 1 $\mu$ Hz to 400 MHz, Square: 1 $\mu$ Hz to 150 MHz
Trigger source	Internal (Timer) / External / Manual
<b>Burst</b>	
Waveforms	Standard waveforms (except DC and Noise), ARB
Type	Trigger or gated
Burst count	1 to 4,294,967,295 cycles or Infinite
<b>TrueArb Mode Specifications</b>	
<b>Output Channels</b>	
Connectors	BNC on front panel
Output type	Single-ended
Output Impedance	50 $\Omega$ or 5 $\Omega$ (low impedance)
<b>General specifications</b>	
Operating Mode	Variable clock (True Arbitrary)
Run Modes	Continuous, Triggered Continuous, Single/Burst, Stepped, Advanced

Vertical Resolution	16 bit
Waveform Length	16 to 2M samples per channel (AWG401X-2M) 16 to 64M samples per channel (AWG401X-64M) 16 to 128M samples per channel (AWG401X-128M) 16 to 1GS samples per channel (AWG401X-1G) where X = 2,4 or 8
Waveform Granularity	1 if the entry length is > 384 samples 16 if entry length is $\geq 32$ and $\leq 384$ samples
Sequence Length	1 to 16384
Sequence Repeat Counter	1 to 4294967294 or infinite
Timer Range	23.52 ns to 7 seconds
Timer Resolution	$\pm 1$ sampling clock cycle
<b>Analog Channel to Channels skew</b>	
Range	0 to 3.4 $\mu$ s
Resolution	$\leq 5$ ps
Accuracy	$\pm(1\%$ of setting + 20 ps)
Initial skew	< 200 ps
<b>Calculated bandwidth</b> (0.35 / rise or fall time)	$\geq 318$ MHz
<b>Harmonic distortion</b> (Sine wave 32 points, 1 $V_{p-p}$ )	< -60 dBc (@ 1.2 GS/s, 37.5 MHz)
<b>Spurious</b> (Sine wave 32 points, 1 $V_{p-p}$ )	< -60 dBc (@ 1.2 GS/s, 37.5 MHz)
<b>SFDR</b> (Sine wave 32 points, 1 $V_{p-p}$ )	< -60 dBc (@ 1.2 GS/s, 37.5 MHz)
<b>Rise/fall time</b> (1 $V_{p-p}$ single-ended 10% to 90%)	$\leq 1.1$ ns
<b>Overshoot</b> (1 $V_{p-p}$ single-ended)	< 2%

<b>Timing and Clock</b>	
<b>Sampling Rate</b>	
Range	1 Sample/s to 1.2 GSample/s
Resolution	16 Hz
Accuracy	$\pm 2.0 \times 10^{-6}$
<b>Random jitter on clock pattern (rms)</b>	< 10 ps
<b>Digital Outputs (Optional)</b>	
<b>Output Channels</b>	
Connectors	Mini-SAS HD connector on rear panel (Non-standard pin-out)
Number of connectors	1
Number of outputs	8-bits
<b>Output impedance</b>	100 $\Omega$ differential
<b>Output type</b>	LVDS
<b>Rise/fall time (10% to 90%)</b>	< 1 ns
<b>Jitter (rms)</b>	20 ps
<b>Maximum update rate</b>	1.2 Gbps
<b>Memory depth</b>	2M samples per channel (AWG401X-2M) 64M samples per channel (AWG401X-64M) 128M samples per channel (AWG401X-128M) 1G samples per channel (AWG401X-1G) where X= 2,4 or 8
<b>Data Pattern Generator (DPG) Specifications - <i>Optional</i></b>	
<b>Output Channels</b>	
Connectors	BNC on front panel
Output type	Single-ended
Output Impedance	50 $\Omega$ or 5 $\Omega$ (low impedance)

<b>General Specifications</b>	
Operating mode	NRZ bitstream Pattern generator
Pattern types	Clock Pattern, Custom Pattern, PRBS pattern
Run Modes	Continuous, modulation, burst (Triggered, Gated, Continuous triggered)
Internal Trigger Timer	
Range	13.3 ns to 100 s
Resolution	104 ps
Accuracy	$\pm(0.1\% \text{ setting} + 5 \text{ ps})$
<b>Transition Specifications</b>	
Transition peculiarity	Arbitrarily user defined transition shapes Programmable duration for any transition
Transitions types	Arbitrary, predefined
Transitions memory length	64 points
Predefined transition Shapes	Sine, Square, Pulse, Ramp_up, Ramp_down, DC, Sin(x)/x, Gaussian, Lorentz, Exponential Rise, Exponential Decay, Haversine
Transition duration[0-100%]	1.5ns to Symbol duration for Custom and PRBS pattern 1,5ns to Period/2 for Clock Pattern
<b>Clock Pattern</b>	
Max clock pattern frequency	150 MHz
Pattern levels	2 levels
Overshoot (1 $V_{p-p}$ )	< 2%
Jitter (rms)	< 20 ps

<p><b>Custom Pattern</b></p> <p>Max custom pattern rate</p> <p>Pattern levels</p> <p>Predefined custom patterns</p> <p>Pattern memory</p> <p>Pattern length resolution</p> <p>Min pattern length</p> <p>Overshoot (1 <math>V_{p-p}</math>)</p>	<p>Up to 300 Mbaud</p> <p>2, 3 or 4 levels</p> <p>Zero, one, clock, counter</p> <p>Up to 2 MBit (2 levels)</p> <p>Up to 1 MSymbols (3 or 4 levels)</p> <p>1 bit</p> <p>4 bits</p> <p>&lt; 2%</p>
<p><b>PRBS Pattern</b></p> <p>Max PRBS pattern rate</p> <p>Pattern levels</p> <p>PRBS types</p> <p>Overshoot (1 <math>V_{p-p}</math>)</p>	<p>Up to 300 Mbaud</p> <p>2 levels</p> <p>PRBS -7,9,11,15,23,31</p> <p>&lt; 2%</p>
<p><b>Pattern Modulation</b></p>	
<p><b>Amplitude Modulation (AM)</b></p> <p>Carrier patterns</p> <p>Modulation source</p> <p>Internal modulating waveforms</p> <p>Modulating frequency</p> <p>Depth</p>	<p>All types</p> <p>Internal or external</p> <p>Sine, Square, Triangular, Ramp_up, Ramp_down, DC, Sin(x)/x, Gaussian, Lorentz, Exponential Rise, Exponential Decay, Haversine, Noise, ARB</p> <p>Internal: 500 <math>\mu</math>Hz to 48 MHz External: 8 MHz maximum</p> <p>0.00% to 120.00%</p>

<b>Frequency Modulation (FM)</b>	
Carrier patterns	All types
Modulation source	Internal or external
Internal modulating waveforms	Sine, Square, Triangular, Ramp_up, Ramp_down, DC, Sin(x)/x, Gaussian, Lorentz, Exponential Rise, Exponential Decay, Haversine, Noise, ARB
Modulating frequency	Internal: 500 $\mu$ Hz to 48 MHz External: 8 MHz maximum
Peak deviation	DC to 300 MSymbols/s
<b>Phase Modulation (PM)</b>	
Carrier patterns	All types
Modulation source	Internal or external
Internal modulating waveforms	Sine, Square, Pulse, Ramp_up, Ramp_down, DC, Sin(x)/x, Gaussian, Lorentz, Exponential Rise, Exponential Decay, Haversine, Noise, ARB
Modulating frequency	Internal: 500 $\mu$ Hz to 48 MHz External: 8 MHz maximum
Phase deviation range	0° to 360°
<b>Frequency Shift Keying (FSK)</b>	
Carrier patterns	All types
Modulation source	Internal or external
Internal modulating waveforms	Square
Key rate	Internal: 500 $\mu$ Hz to 48 MHz External: 8 MHz maximum

<p>Hope Symbol Rate</p> <p>Number of keys</p>	<p>1uSymbols/s to 300 MSymbols/s for Custom and PRBS pattern</p> <p>1uHz to 150 MHz for Clock pattern</p> <p>2</p>
<p><b>Phase Shift Keying (PSK)</b></p>	
<p>Carrier patterns</p> <p>Modulation source</p> <p>Internal modulating waveforms</p> <p>Key rate</p> <p>Hop phase</p> <p>Number of keys</p>	<p>All types</p> <p>Internal or external</p> <p>Square</p> <p>Internal: 500 <math>\mu</math>Hz to 48 MHz, External: 8 MHz maximum</p> <p>0° to +360°</p> <p>2</p>
<p><b>Burst</b></p>	
<p>Patterns</p> <p>Type</p> <p>Burst count</p>	<p>All types</p> <p>Block mode or Bit mode</p> <p>1 to 4,294,967,295 cycles or Infinite</p>

**8 bit LVDS to LVTTTL Converter  
Probe (Optional AT-DTLL8)**


Output connector	20 position 2.54 mm 2 Row IDC Header
Output type	LVTTTL
Output impedance	50 $\Omega$ nominal
Output voltage	0.8V to 3.8V programmable in group of 8 bits
Maximum Update Rate	125 Mbps@0.8V and 400 Mbps@3.6V
Dimensions	W 52 mm – H 22 mm – D 76 mm
Input Connector	Proprietary standard
Cable Length	1 meter
Cable Type	Proprietary standard

**Proprietary Mini SAS HD to SMA  
cable (Optional)**


Output connector	SMA
Output type	LVDS
Number of SMA	16 (8 bits)
Cable type	Proprietary standard
Cable Length	1 meter

**Auxiliary input and output characteristics**
**Marker Output**
**Connector type**
**Number of connectors**
**Output impedance**
**Output level (into 50  $\Omega$ )**

Amplitude

BNC on front panel

1, 2 or 4

 50  $\Omega$ 

1 V to 2.5 V

Resolution	10 mV
Accuracy	$\pm(2\% \text{ setting} + 10 \text{ mV})$
<b>Rise/fall time</b> (10% to 90%, 2.5 V <sub>p-p</sub> )	< 700 ps
<b>Jitter</b> (rms)	20 ps
<b>Marker out to analog channel skew</b>	
Range	AFG and DPG Mode: 0 to 14s in Continuous Mode 0 to 3 us in Triggered Mode True Arb Mode: 0 to 3μs
Resolution	AFG and DPG Mode: 39 ps True Arb Mode: 78 ps,
Accuracy	$\pm(1\% \text{ of setting} + 140 \text{ ps})$
Initial skew	< 1 ns
<b>Trigger/Gate Input</b>	
Connector type	BNC on the Front Panel
Input impedance	50Ω / 1kΩ
Slope/Polarity	Positive or negative or both
Input damage level	< -15 V or > +15 V
Threshold control level	-10 V to 10 V
Resolution	50 mV
Threshold control accuracy	$\pm(10\% \text{ of }  \text{setting}  + 0.2 \text{ V})$
Input voltage swing	0.5 V <sub>p-p</sub> minimum
Minimum pulse width (1 V <sub>p-p</sub> )	3 ns
Initial trigger delay to Analog	AFG: < 360 ns (< 420 ns in triggered sweep mode, AFG only)
Output	True Arb mode: < 240 * DAC clock period + 32 ns DPG mode: < 370 ns  AFG and DPG mode: < 40 ps

Trigger In to output jitter	True Arb mode: 0.29*DAC clock period
Maximum Frequency	AFG and DPG mode: 65 MTps on Rising/Falling Edge 80 MTps on Both Edges True Arb mode: 42.5 MTps where MTps = Mega Transitions per second
<b>Reference Clock Input</b>	
Connector type	SMA on rear panel
Input impedance	50 $\Omega$ , AC coupled
Input voltage range	-4 dBm to 11 dBm sine or square wave (Rise time T10-90 < 1 ns and Duty Cycle from 40% to 60%)
Damage level	+14 dBm
Frequency range	5 MHz to 100 MHz
<b>Reference Clock Output</b>	
Connector type	SMA on rear panel
Output impedance	50 $\Omega$ , AC coupled
Frequency	10 MHz
Accuracy	$\pm$ 2.0 ppm
Aging	$\pm$ 1.0 ppm/year
Amplitude	1.65V
Jitter (rms)	< 20 ps
<b>External Modulation Input</b>	
Connector type	SMA on rear panel
Input impedance	>2 M $\Omega$
Number of inputs	1
Bandwidth	8 MHz with 40 MS/s sampling rate
Input voltage range	-1V to +1V (open load)
Vertical resolution	8-bit

<b>Power</b>	
<b>Source Voltage and Frequency</b>	100 to 240 VAC ±10% @ 45-66 Hz
<b>Maximum power consumption</b>	150 W
<b>Environmental characteristics</b>	
<b>Temperature</b> (operating)	+5 °C to +40 °C (+41 °F to 104 °F)
<b>Temperature</b> (non-operating)	-20 °C to +60 °C (-4 °F to 140 °F)
<b>Humidity</b> (operating)	5% to 80% relative humidity with a maximum wet bulb temperature of 29°C at or below +40°C, (upper limit de-rates to 20.6% relative humidity at +40°C). Non-condensing.
<b>Humidity</b> (non-operating)	5% to 95% relative humidity with a maximum wet bulb temperature of 40°C at or below +60°C, upper limit de-rates to 29.8% relative humidity at +60°C. Non-condensing.
<b>Altitude</b> (operating)	3,000 meters (9,842 feet) maximum at or below 25°C
<b>Altitude</b> (non-operating)	12,000 meters (39,370 feet) maximum
<b>EMC and safety</b>	
<b>Compliance</b>	CE compliant
<b>Safety</b>	EN61010-1
<b>Main Standards</b>	EN 61326-1:2013 – Electrical equipment for measurement, control and laboratory use – EMC requirements – Part 1: General requirements
<b>Immunity</b>	EN 61326-1:2013
<b>System specifications</b>	
<b>Display</b>	7 inch, 1024x600, capacitive touch LCD
<b>Operative System</b>	Windows 10
<b>External Dimensions</b>	W 445 mm – H 135 mm – D 320 mm (3U 19" rackmount)
<b>Weight</b>	9.5Kg (AWG4012) – 10.3Kg (AWG4014) – 12Kg (AWG4018)

<b>Front panel connectors</b>	<p>CH1 to CH8 OUTPUT (BNC)</p> <p>MARKER OUT 1 to 4 (BNC)</p> <p>TRIGGER IN (BNC)</p>
<b>Rear panel connectors</b>	<p>Ref Clk In (SMA)</p> <p>Ref Clk Out (SMA)</p> <p>Ext Mod In (SMA)</p> <p>External Monitor ports (one or more)</p> <p>DIGITAL POD A[7..0] (AWG 4012 / 4014 / 4018)</p> <p>DIGITAL POD B[7..0] (AWG 4014 / 4018)</p> <p>DIGITAL POD C[7..0] (AWG 4018)</p> <p>DIGITAL POD D[7..0] (AWG 4018)</p> <p>1 USB 2.0 ports or more</p> <p>Ethernet port (10/100/1000BaseT Ethernet, RJ45 port)</p> <p>2 PS/2 keyboard and mouse ports</p>
<b>Hard Disk</b>	<p>32 GB SSD or better</p>
<b>Processor</b>	<p>Intel® Celeron J1900, 2 GHz (or better)</p>
<b>Processor Memory</b>	<p>4 GB or better</p>

## Table of Available Models

Item	Description
<b>AWG4012-2M</b>	2ch 1.2 GS/s AWG 2MS memory - 400MHz AFG - 6Vpp
<b>AWG4012-64M</b>	2ch 1.2 GS/s AWG 64MS memory - 400MHz AFG - 6Vpp
<b>AWG4012-128M</b>	2ch 1.2 GS/s AWG 128MS memory - 400MHz AFG - 6Vpp
<b>AWG4012-1G</b>	2ch 1.2 GS/s AWG 1GS memory - 400MHz AFG - 6Vpp
<b>AWG4014-2M</b>	4ch 1.2 GS/s AWG 2MS memory - 400MHz AFG - 6Vpp
<b>AWG4014-64M</b>	4ch 1.2 GS/s AWG 64MS memory – 400MHz AFG - 6Vpp
<b>AWG4014-128M</b>	4ch 1.2 GS/s AWG 128MS memory - 400MHz AFG - 6Vpp
<b>AWG4014-1G</b>	4ch 1.2 GS/s AWG 1GS memory - 400MHz AFG - 6Vpp
<b>AWG4018-2M</b>	8ch 1.2 GS/s AWG 2MS memory - 400MHz AFG - 6Vpp
<b>AWG4018-64M</b>	8ch 1.2 GS/s AWG 64MS memory - 400MHz AFG - 6Vpp
<b>AWG4018-128M</b>	8ch 1.2 GS/s AWG 128MS memory - 400MHz AFG - 6Vpp
<b>AWG4018-1G</b>	8ch 1.2 GS/s AWG 1GS memory - 400MHz AFG - 6Vpp

## Table of Available Options and Accessories

Item	Description
<b>Options</b>	
<b>AWG-4012-HV</b>	High voltage output (12Vpp on 50ohm) for AWG4012
<b>AWG-4014-HV</b>	High voltage output (12Vpp on 50ohm) for AWG4014
<b>AWG-4018-HV</b>	High voltage output (12Vpp on 50ohm) for AWG4018
<b>AWG-4010-DIG8</b>	8 channel Dig license (Mini SAS cable included) for AWG401x
<b>AWG4012-WAR</b>	3 years warranty extension for AWG4012
<b>AWG4014-WAR</b>	3 years warranty extension for AWG4014
<b>AWG4018-WAR</b>	3 years warranty extension for AWG4018
<b>AWG4012-PAT</b>	2ch Serial pattern generator option
<b>AWG4014-PAT</b>	4ch Serial pattern generator option
<b>AWG4018-PAT</b>	8ch Serial pattern generator option
<b>Accessories</b>	
<b>AT-LVDS-SMA8</b>	Mini SAS HD to 16 SMA cable (8 LVDS output)
<b>AT-DTTL8</b>	8 bit LVDS to LVTTTL converter for Rider series
<b>RIDER-RACK</b>	Rackmount kit for Rider series instruments (Pulse, Funct., Arb.)
<b>RIDER-AWG-SYNC</b>	Synchronization cable for AWG Rider series
<b>GPIB / USB-TMC</b>	GPIB and USBTMC Ports for Remote Control
<b>SSD-250</b>	Additional 250GB Solid State Disk for RIDER series
<b>SSD-500</b>	Additional 500GB Solid State Disk for RIDER series
<b>SSD-1000</b>	Additional 1TB Solid State Disk for RIDER series